

FEATURES :

- **Small Size**
- **Wide Passband**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	9.4
Insertion Loss@Center Freq. [dB]	0.4
1dB Bandwidth, [GHz] min.	1.0
Reject Bands, [GHz]	DC to 6.8 and 11.2 to 26.5
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL3-9400-800	SMA

Outline drawing

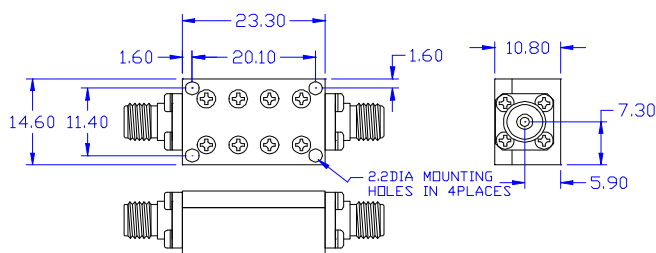

Dimensions in mm

Typical Performance

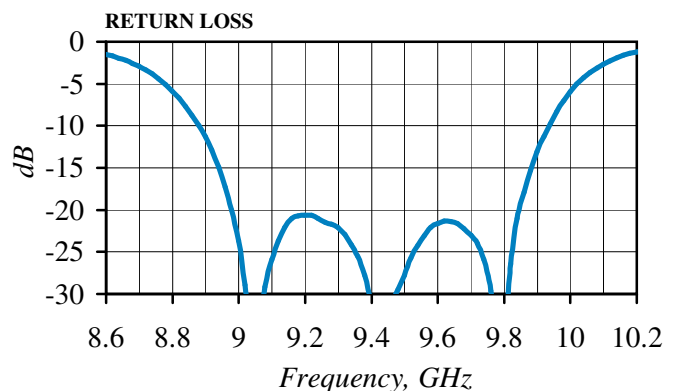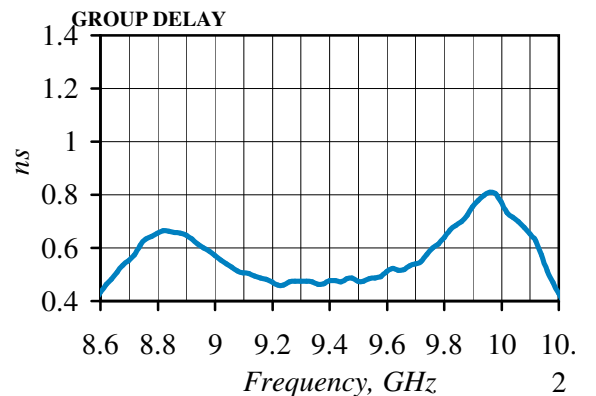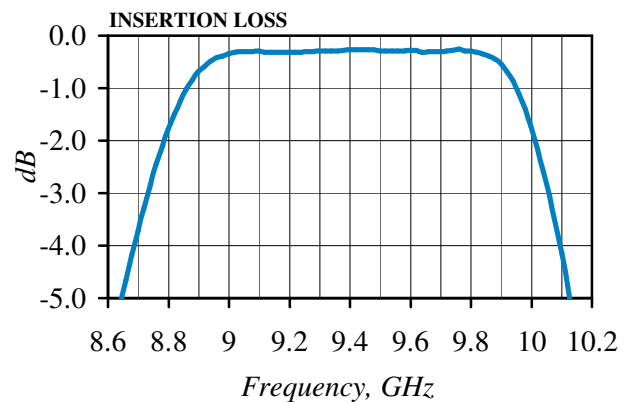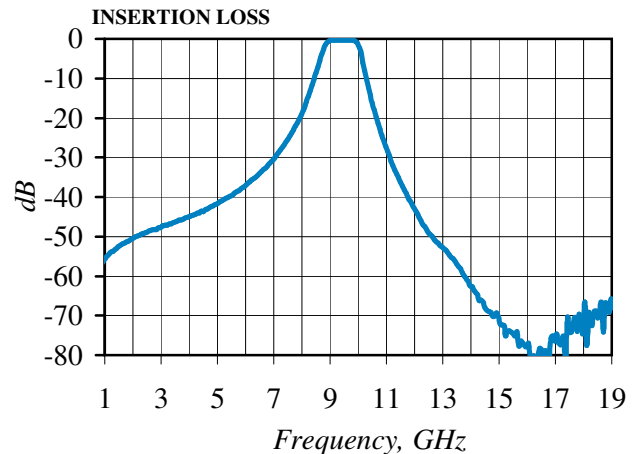

Specifications Subject To Change Without Notice