

FEATURES :

- **Narrow Bandwidth**
- **High Power**
- **Low Loss**

SPECIFICATIONS

Center Frequency, [MHz]	2339
0.5dB Bandwidth, [MHz] min.	12
35dB Bandwidth, [MHz] max.	70
60dB Bandwidth, [MHz] max.	125
Insertion Loss@Center Freq. [dB]	1.2
VSWR	1.5 : 1
Average Power, [Watts]	100


Operating Characteristics

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL4-2339-12-SMA	SMA
FCL4-2339-12-N	N
FCL4-2339-12-TNC	TNC

Outline drawing

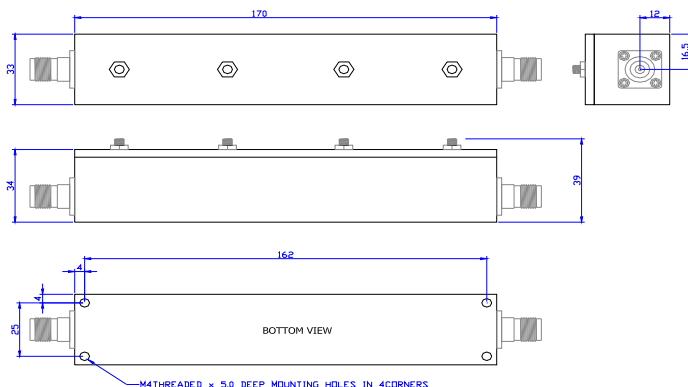

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

