

FEATURES :

- **Small Size**
- **Steep Rejection**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	7.8
Insertion Loss@Center Freq. [dB]	1.3
1dB Bandwidth, [MHz] min.	100
20dB Bandwidth, [MHz] max.	225
Reject Bands, [GHz]	DC to 7.33 and 8.33 to 22GHz
Reject Attenuation, [dB] min.	60
VSWR	1.3 : 1
Average Power, [Watts]	10
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL4-7830-100	SMA

Outline drawing

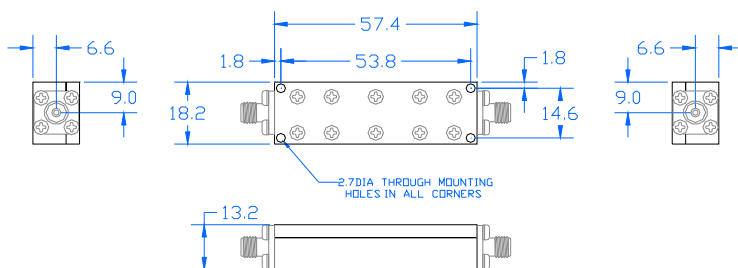

Dimensions in mm

Typical Performance

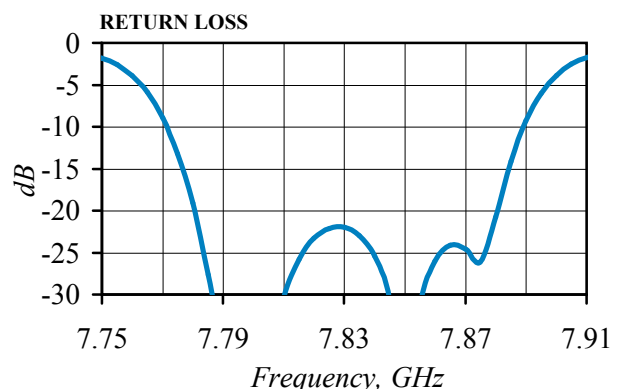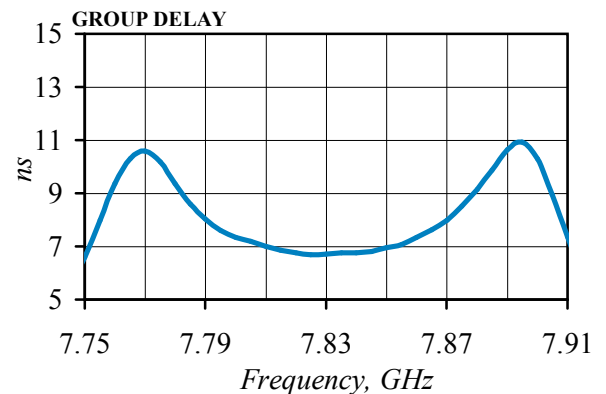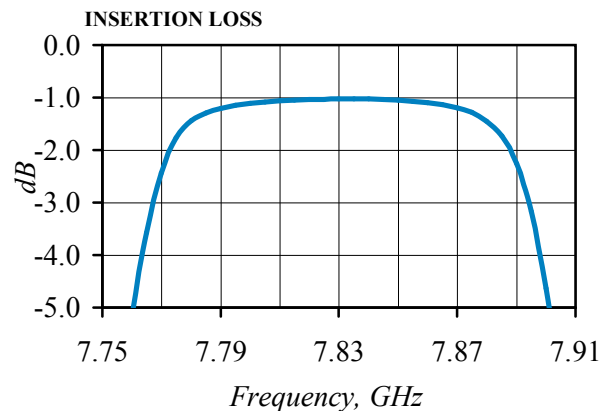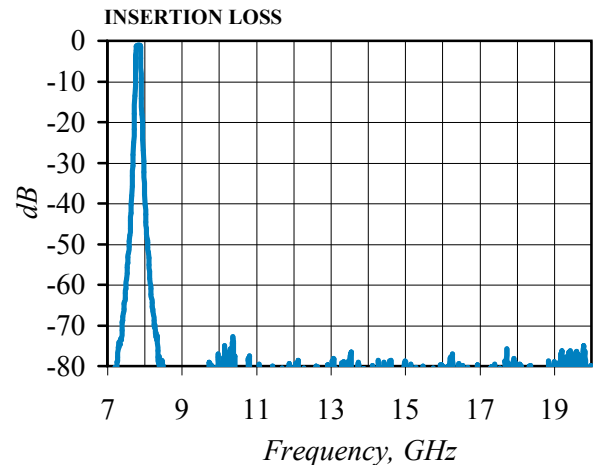

Specifications Subject To Change Without Notice