

**FEATURES :**

- Small Package
- High Q Response
- Low Loss Response

**SPECIFICATIONS**

Center Frequency, [MHz]	1464
1dB Bandwidth, [MHz]	120
Reject Bands, [GHz]	DC to 1.2 and 1.7 to 7
Reject Attenuation, [dB] min.	50
Insertion Loss@Center Freq. [dB]	0.4
VSWR	1.5 : 1
Average Power, [Watts]	25


**Operating Characteristics**

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FCL5-1464-120-SMA	SMA
FCL5-1464-120-N	N

**Outline drawing**

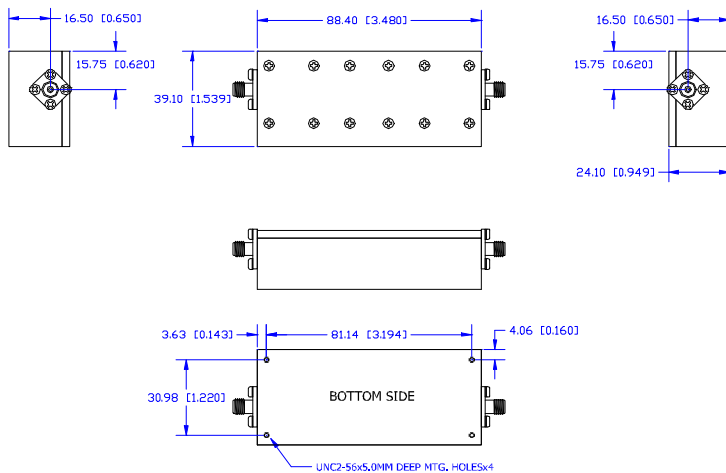

Dimensions in inches

Specifications Subject To Change Without Notice

**Typical Performance**

