

**FEATURES :**

- **Small Package**
- **High Q Response**
- **Low Loss Response**

**SPECIFICATIONS**




Center Frequency, [MHz]	16500
1dB Bandwidth, [MHz] min.	800
30dB Bandwidth, [MHz] max.	1510
Reject Bands, [GHz]	DC to 14.9 and 18.1 to 30
Reject Attenuation, [dB] min.	60
Insertion Loss@Center Freq. [dB]	1.2
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

**Operating Characteristics**

**Ordering Information**





Model No.	Connectors
FCL5-16500-800-SMA	SMA

**Outline drawing**

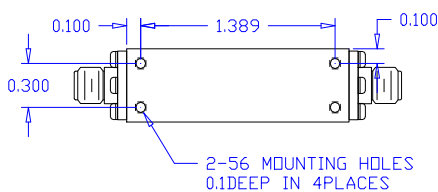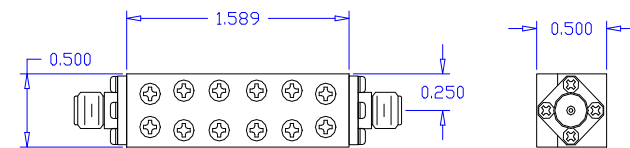

Dimensions in inches

**Typical Performance**

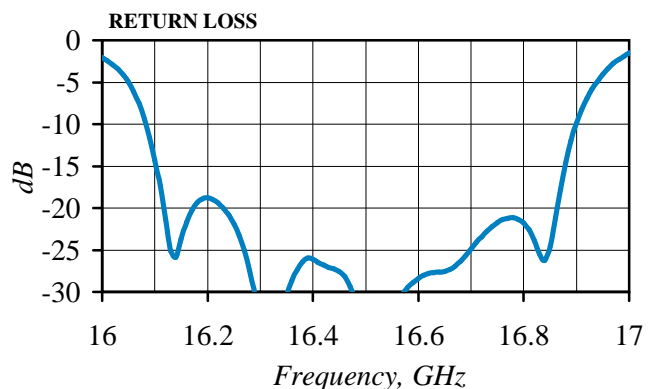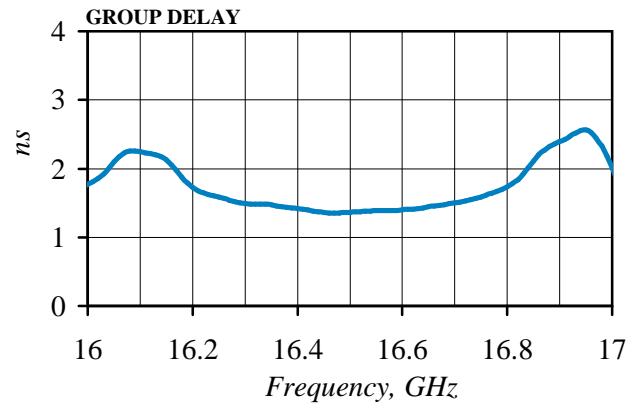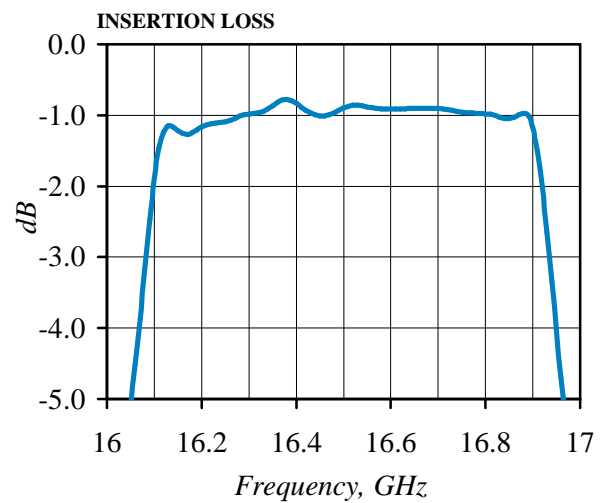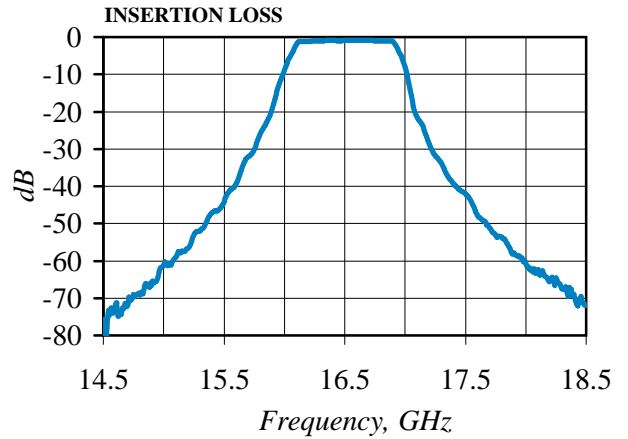

Specifications Subject To Change Without Notice