

**FEATURES :**

- **Small Size**
- **Wide Stopband**
- **Low Loss**

**SPECIFICATIONS**


Center Frequency, [MHz]	3150
Insertion Loss@Center Freq. [dB]	1.6
1dB Bandwidth, [MHz] min.	50.0
30dB Bandwidth, [MHz] max.	120
Reject Bands, [GHz]	DC to 3.05
Reject Attenuation, [dB] min.	3.25 to 18
VSWR	50
Average Power, [Watts]	1.3 : 1
Operating Temperature	10
Impedance, [Ohm]	40°C to +85°C

**Operating Characteristics**

**Ordering Information**

Model No.	Connectors
FCL5-3150-50-SMA	SMA

**Outline drawing**

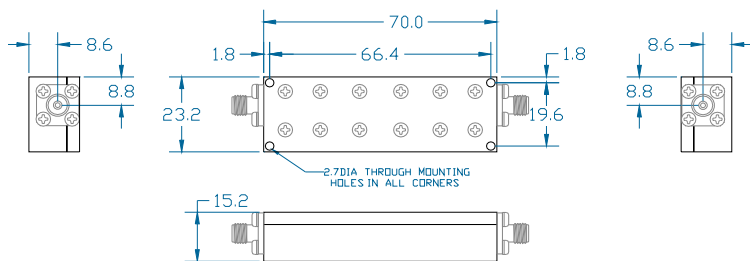

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

