

FEATURES :

- **Small Package**
- **High Q Response**
- **Low Loss Response**

SPECIFICATIONS

Center Frequency, [MHz]	11300
1dB Bandwidth, [MHz]	750
30dB Bandwidth, [MHz]	1300
Reject Bands, [GHz]	DC to 10.1 and 12.4 to 38
Reject Attenuation, [dB] min.	60
Insertion Loss@Center Freq. [dB]	1.1
VSWR	1.5 : 1
Average Power, [Watts]	5


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL6-11300-800-SMA	SMA F
FCL6-11300-800-SMAM	SMA M

Outline drawing

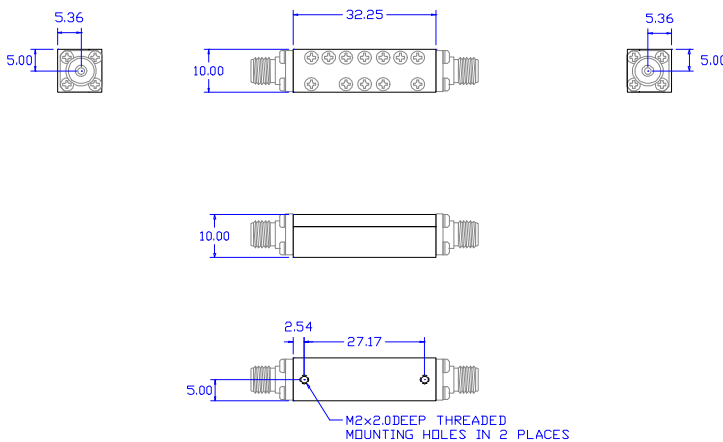

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

