

FEATURES :

- Wide Stopband
- Steep Rejection
- Low Loss

SPECIFICATIONS

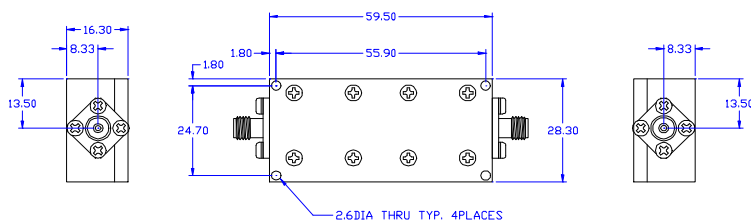
Center Frequency, [GHz]	2.15
Insertion Loss@Center Freq. [dB]	0.5
1dB Bandwidth, [MHz] min.	360
30dB Bandwidth, [MHz] max.	610
Reject Bands, [GHz]	DC to 1.5 and 2.6 to 10
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	25
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL6-2150-400	SMA

Mechanical

Dimensions, [mm]	59.5x28.3x16.3
Weight, [g]	80

Outline drawing


Dimensions in mm

Typical Performance
