

FEATURES :

- **Small Size**
- **Steep Rejection**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	10
Insertion Loss@Center Freq. [dB]	1.3
1dB Bandwidth, [MHz] min.	200
30dB Bandwidth, [MHz] max.	450
Reject Bands, [GHz]	DC to 9.75 and 10.25 to 22
Reject Attenuation, [dB] min.	40
VSWR	1.5 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL7-10000-200	SMA

Outline drawing

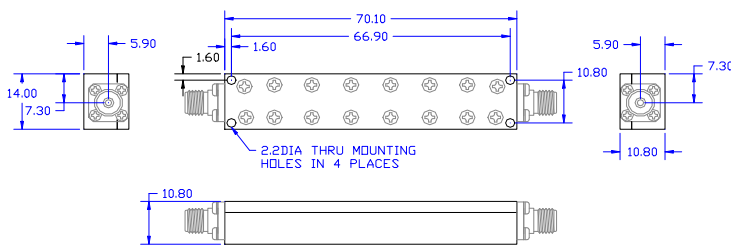

Dimensions in mm

Typical Performance

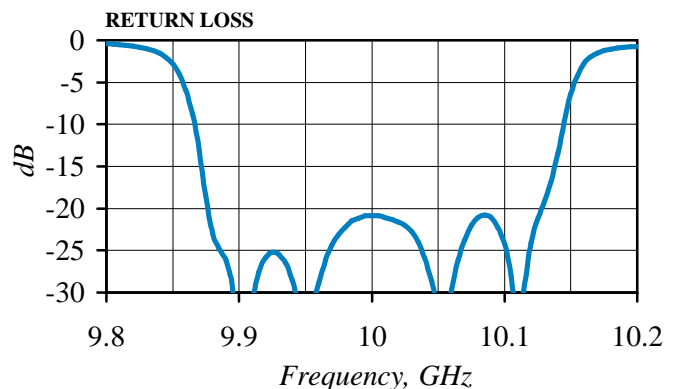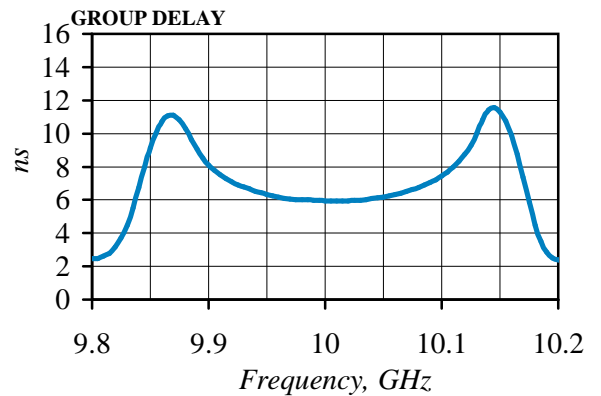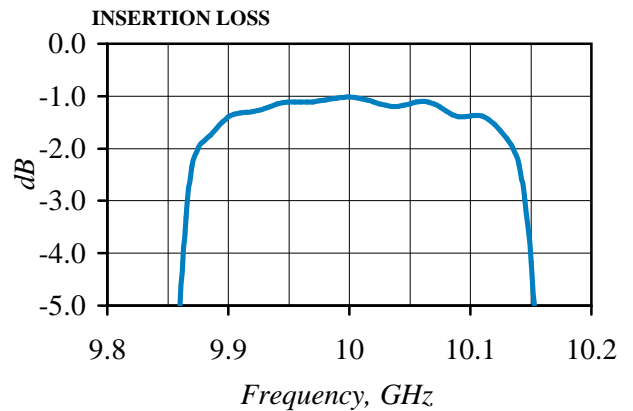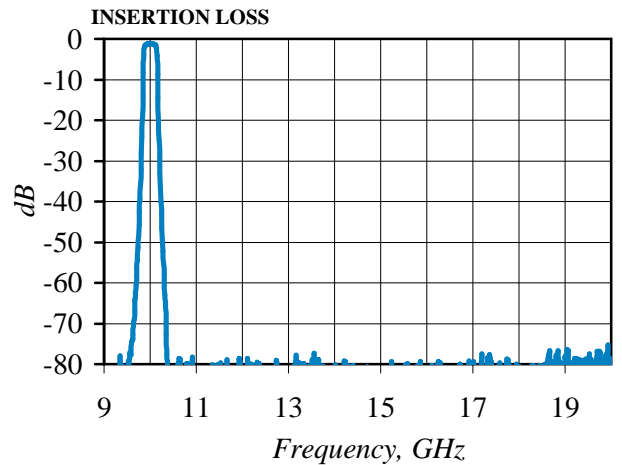

Specifications Subject To Change Without Notice