

FEATURES :

- Small Package
- High Q Response
- Low Loss Response

SPECIFICATIONS

Center Frequency, [MHz]	2400
Insertion Loss@Center Freq. [dB]	0.6
1dB Bandwidth, [MHz] max.	400
20dB Bandwidth, [MHz] max.	570
Reject bands [GHz]	DC to 2 and 2.75 to 9.5
Reject Attenuation [dB], min.	40
VSWR	1.5 : 1
Average Power, [Watts]	10


Operating Characteristics

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FCL7-2400-400-SMA	SMA
FCL7-2400-400-N	N

Outline drawing

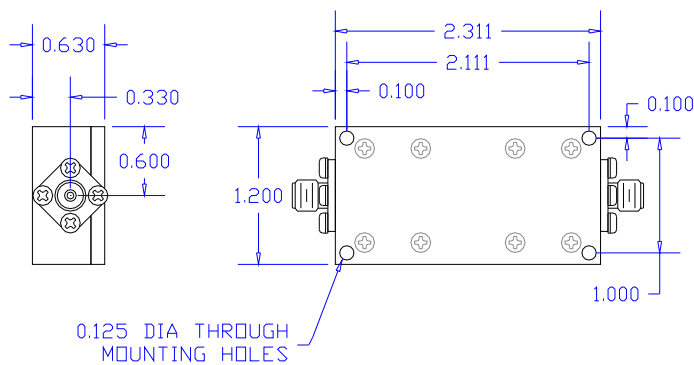

Dimensions in inches

Typical Performance

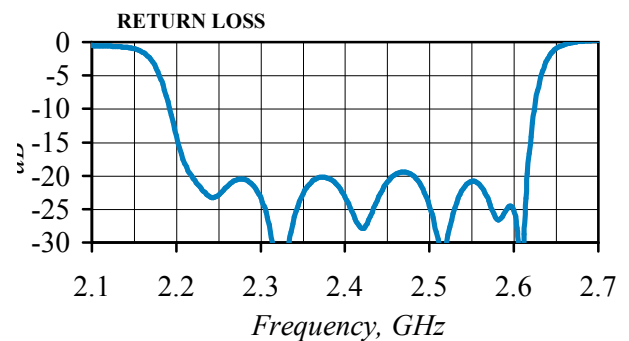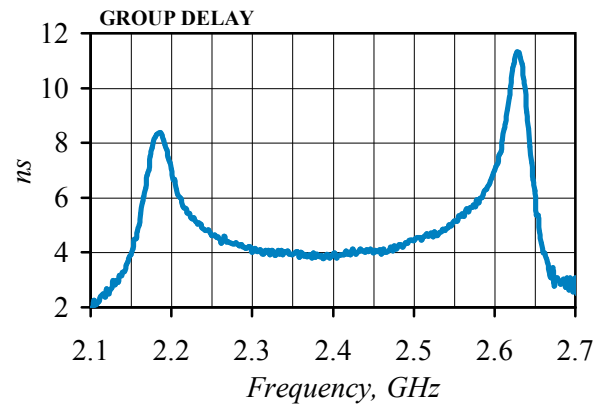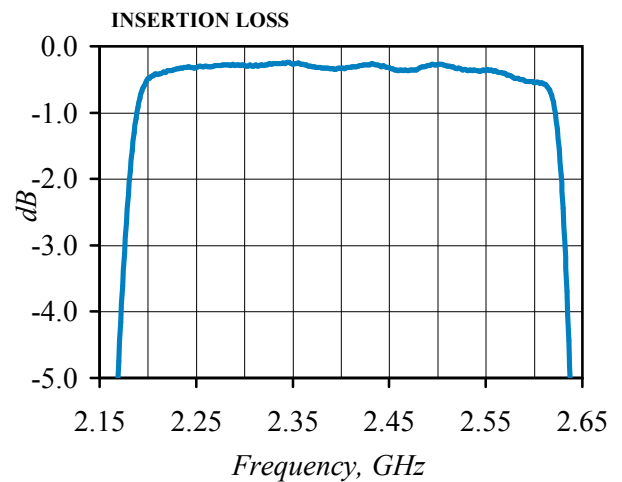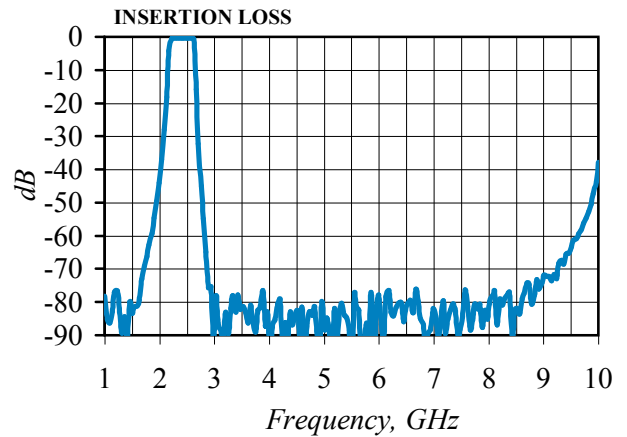

Specifications Subject To Change Without Notice