

**FEATURES :**

- **Small Size**
- **Steep Rejection**
- **Low Loss**


**SPECIFICATIONS**

Center Frequency, [GHz]	2.65
Insertion Loss@Center Freq. [dB]	0.6
3dB Bandwidth, [MHz] min.	300
20dB Bandwidth, [MHz] max.	425
Reject Bands, [GHz]	DC to 2.1 and 3.1 to 10
Reject Attenuation, [dB] min.	80
VSWR	1.5 : 1
Average Power, [Watts]	25
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FCL7-2650-300	SMA

**Outline drawing**

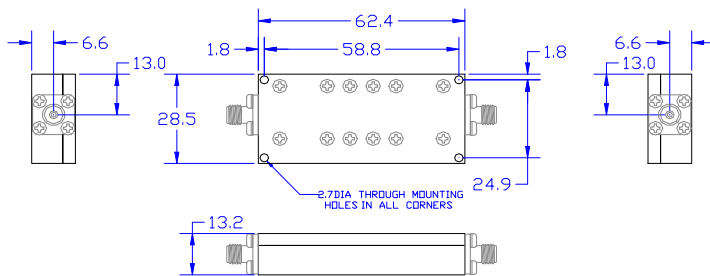

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

