

FEATURES :

- High Power
- Low loss
- Steep rejection


SPECIFICATIONS @+25°C

Center Frequency, [GHz]	2.075
1dB Passband, [MHz] min.	20
Loss @CF, [dB] max.	1.8
Reject Bands, [GHz]	DC to 2.049 & 2.101 to 6.5
Reject Attenuation, [dB] min.	60
VSWR	1.3 : 1
Average Power, [Watts]	50
Operating Characteristics	
Operating Temperature	-20°C to +65°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors IN/OUT
FCL8-2075-20	N-female

Outline drawing

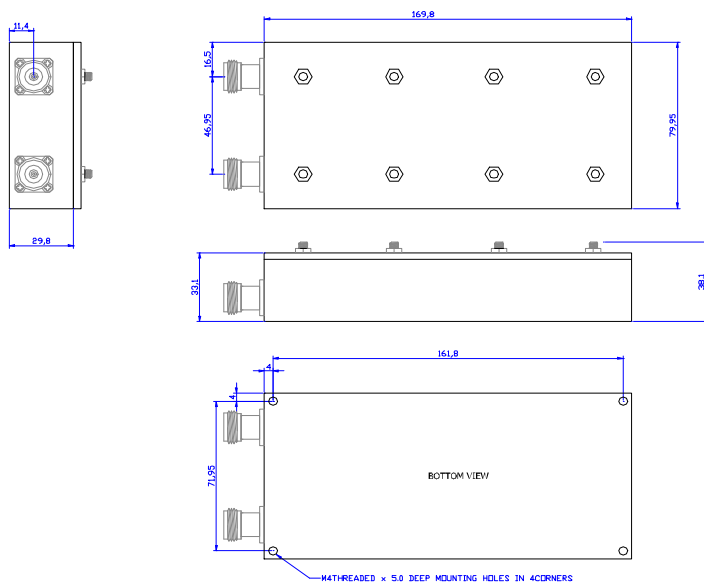

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

