

FEATURES :

- **Small Package**
- **High Q Response**
- **Low Loss Response**

SPECIFICATIONS

Center Frequency, [MHz]	2700
1dB Bandwidth, [MHz] min.	200
30dB Bandwidth, [MHz] max.	280
60dB Bandwidth, [MHz] max.	370
Insertion Loss@Center Freq. [dB]	1
VSWR	1.5 : 1
Average Power, [Watts]	10


Operating Characteristics

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FCL9-2700-200-SMA	SMA
FCL9-2700-200-N	N

Outline drawing

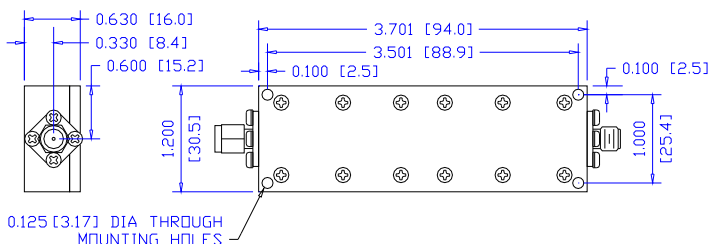

Dimensions in inches [mm]

Typical Performance

