

FEATURES :

- *Low Loss*
- *Small Size*
- *Wide Passband*

SPECIFICATIONS

3dB Corner Frequency, [MHz] typ.	32
Passband Frequency, MHz	35 to 1000
Passband Loss, [dB] typ / max.	0.5 / 0.7
Stopband Frequency, MHz	DC to 26
Stopband Rejection, [dB] min.	60
VSWR	1.5 : 1

Operating Characteristics


Input Power, [W] with matched load	50
Impedance, [Ohm]	50
Connectors	N
Operating Temperature	-20°C to +70°C

Ordering Information

Model No.

FHL-35-50W

Outline drawing dimensions in mm

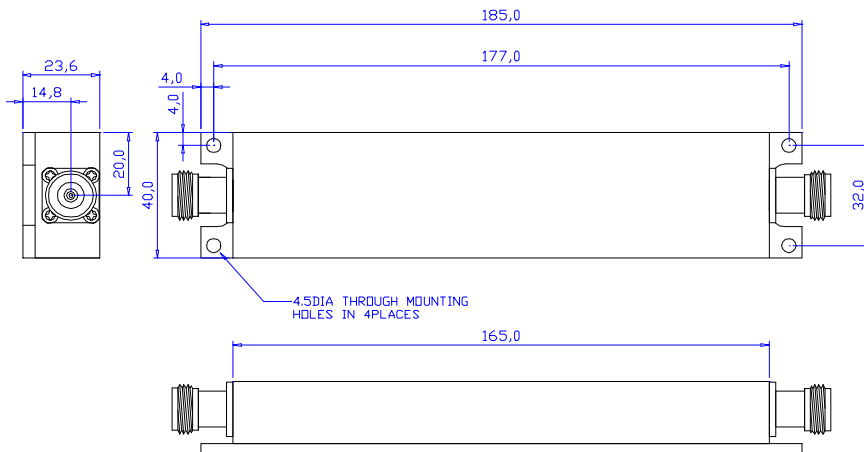

Typical Performance

