

FEATURES :

- **Low Loss**
- **Small Size**
- **Wide Passband**

SPECIFICATIONS

3dB Corner Frequency, [KHz] typ.	9.5
Passband Frequency, MHz	0.01 to 20
Passband Loss, [dB] max.	1.0
Stopband Frequency, KHz	DC to 5.0
Stopband Rejection, [dB] min.	60
VSWR	1.3 : 1


Operating Characteristics

Input Power, [dBm] max. with matched load	28
Impedance, [Ohm]	50
Connectors	SMA, N
Operating Temperature	-20°C to +70°C

Ordering Information

Model No.	Connectors
FHL9-10K-SMA	SMA
FHL9-10K-N	N

Outline drawing dimensions in mm

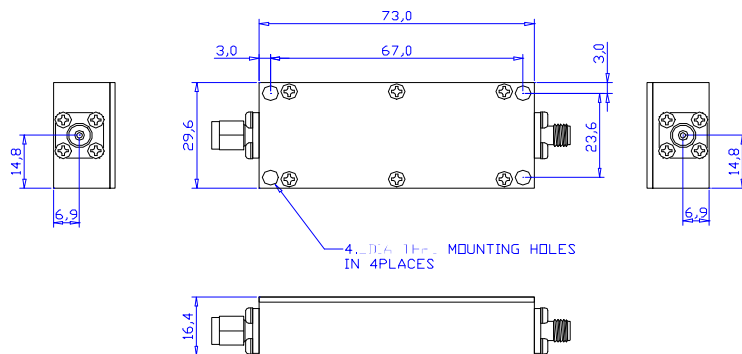

Typical Performance

