

FEATURES :

- *Low Loss*
- *Small Size*
- *Wide Passband*

SPECIFICATIONS

3dB Corner Frequency, [KHz] typ.	4.6
Passband Frequency, MHz	0.005 to 20
Passband Loss, [dB] max.	1.0
Stopband Frequency, KHz	DC to 2.6
Stopband Rejection, [dB] min.	60
VSWR	1.5 : 1


Operating Characteristics

Input Power, [dBm] max. with matched load	26
Impedance, [Ohm]	50
Connectors	SMA, N
Operating Temperature	-20°C to +70°C

Ordering Information

Model No.	Connectors
FHL9-5K-SMA	SMA
FHL9-5K-N	N

Outline drawing dimensions in mm

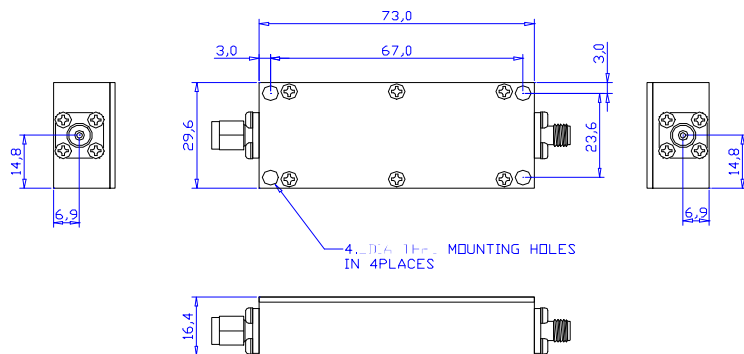

Typical Performance

