

**FEATURES :**

- **Small Size**
- **Wide Passband**
- **Low Loss**


**SPECIFICATIONS**

Center Frequency, [GHz]	13
Insertion Loss@Center Freq. [dB]	1.0
1dB Bandwidth, [GHz] min.	10.0
20dB Bandwidth, [GHz] max.	12
Reject Bands, [GHz]	DC to 6 and 20.5 to 30
Reject Attenuation, [dB] min.	40
VSWR	1.7 : 1
Average Power, [Watts]	5
<b>Operating Characteristics</b>	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

**Ordering Information**

Model No.	Connectors
FID10-13000-10000	SMA

**Outline drawing**

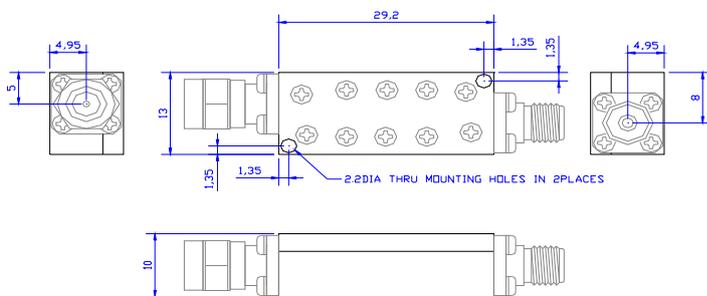

Dimensions in mm

Specifications Subject To Change Without Notice

**Typical Performance**

