

FEATURES :

- **Small Size**
- **Wide Passband**
- **Low Loss**

SPECIFICATIONS

Center Frequency, [GHz]	1.4
Insertion Loss@Center Freq. [dB]	0.4
1dB Bandwidth, [MHz] min.	600
20dB Bandwidth, [MHz] max.	800
Reject Bands, [GHz]	DC to 0.9 and 1.95 to 3.1
Reject Attenuation, [dB] min.	50
VSWR	1.5 : 1
Average Power, [Watts]	50


Operating Characteristics

Operating Temperature	-40°C to+85°C
Impedance, [Ohm]	50

Ordering Information




Model No.	Connectors
FID10-1400-600-SMA	SMA
FID10-1400-600-N	N

Outline drawing

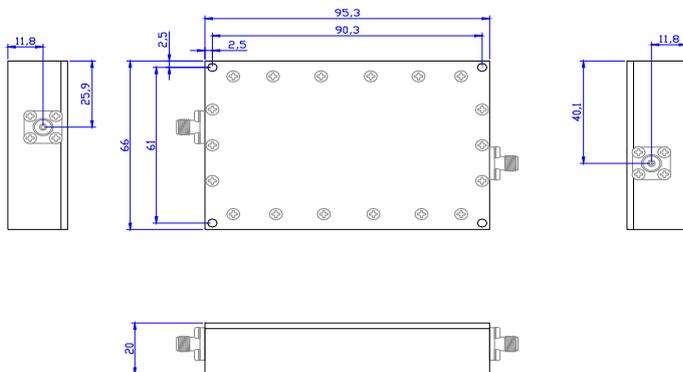

Dimensions in mm

Typical Performance

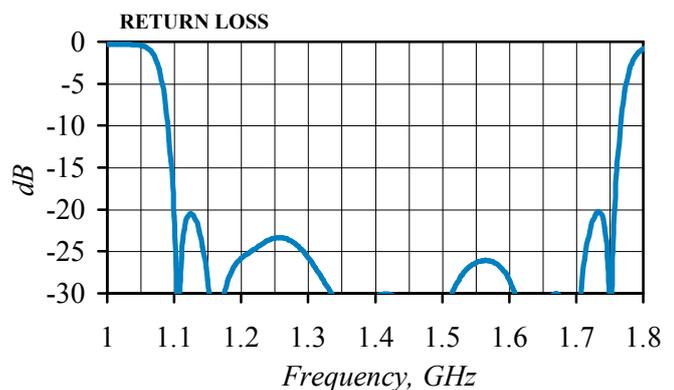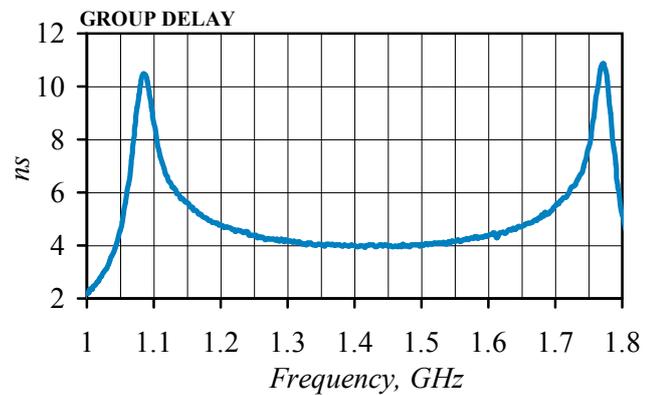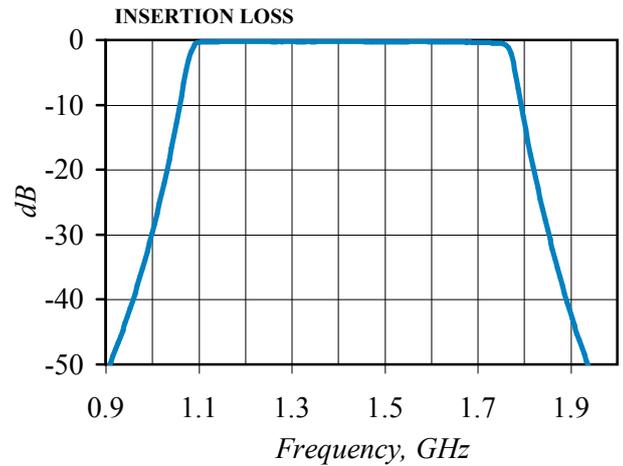

Specifications Subject To Change Without Notice