

FEATURES :

- **Small Size**
- **Wideband**
- **Low Loss**

SPECIFICATIONS

Center Frequency, [GHz]	5.2
Passband, [GHz]	3.6 to 6.8
Insertion Loss in passband, [dB] max.	1.5
Reject Bands, [GHz]	DC to 2.8 & 7.5 to 15
Reject Attenuation, [dB] min.	50
VSWR	2.0 : 1
Average Power, [Watts]	5


Operating Characteristics

Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information

Model No.	Connectors
FID10-5200-3200	SMA-female

Outline drawing

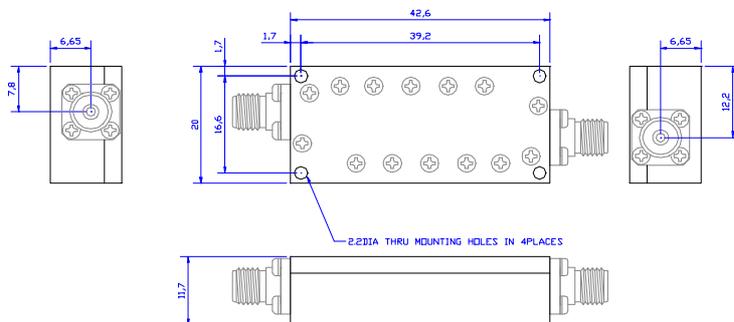

Dimensions in mm

Specifications Subject To Change Without Notice

Typical Performance

