

FEATURES :

- **Small Size**
- **Wide Passband**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	9
Insertion Loss@Center Freq. [dB]	0.6
1dB Bandwidth, [GHz] min.	4.6
20dB Bandwidth, [GHz] max.	5.2
Reject Bands, [GHz]	DC to 5.5 and 12.5 to 21
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	10
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information




Model No.	Connectors
FID12-9000-4600	SMA

Outline drawing

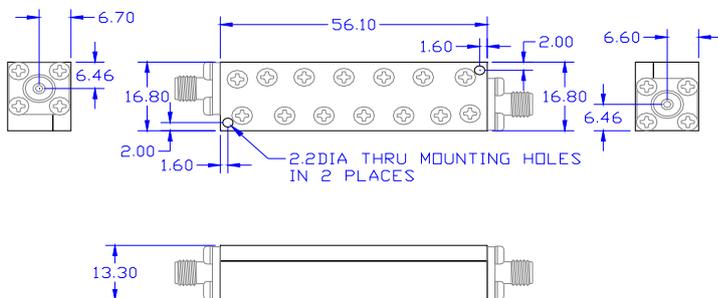

Dimensions in mm

Typical Performance

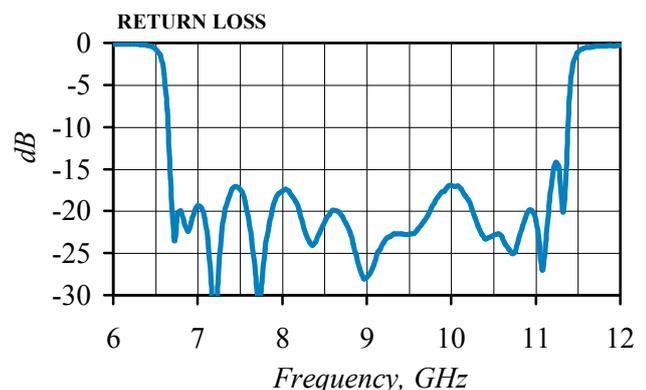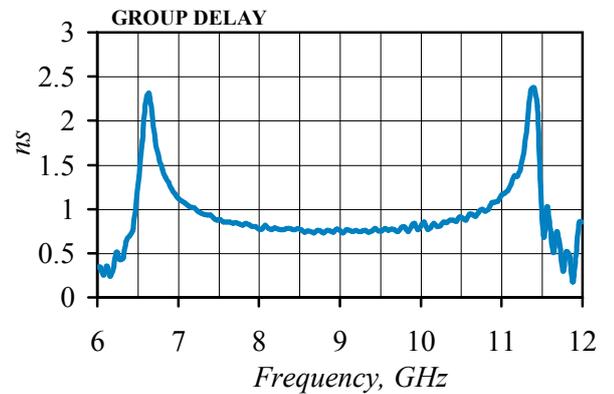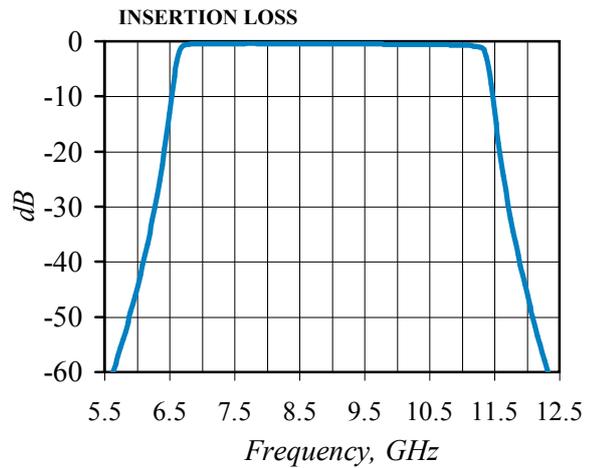

Specifications Subject To Change Without Notice