

FEATURES :

- **Small Size**
- **Wide Passband**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	11
Insertion Loss@Center Freq. [dB]	1.0
1dB Bandwidth, [GHz] min.	6.0
20dB Bandwidth, [GHz] max.	6.5
Reject Bands, [GHz]	DC to 7 and 15 to 25
Reject Attenuation, [dB] min.	60
VSWR	1.7 : 1
Average Power, [Watts]	5
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FID14-11000-6000	SMA

Outline drawing

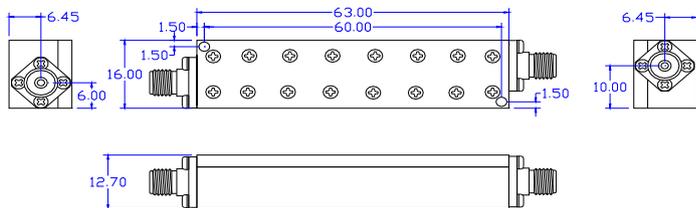

Dimensions in mm

Typical Performance

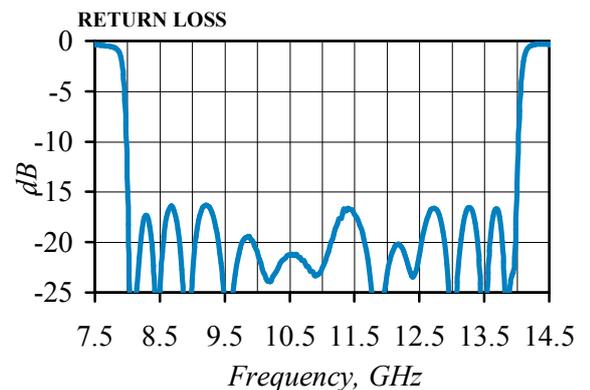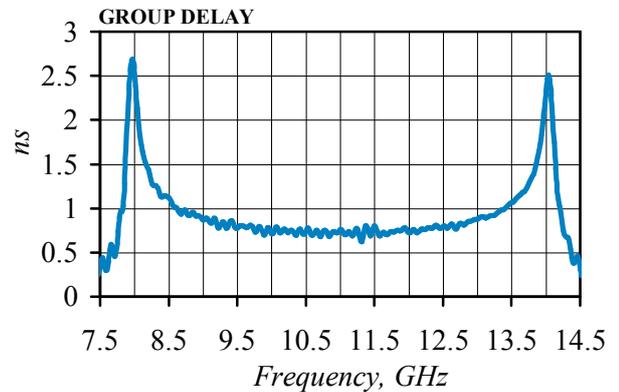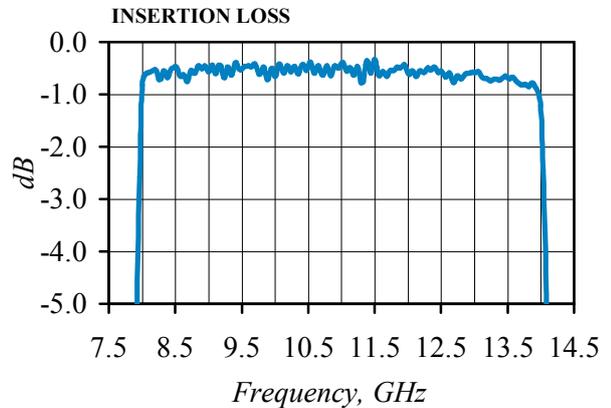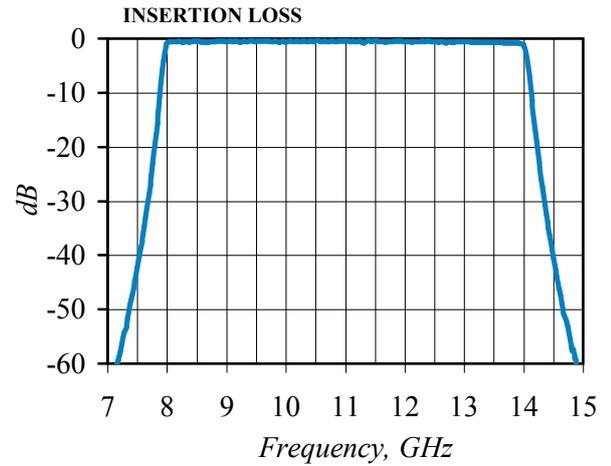

Specifications Subject To Change Without Notice