

FEATURES :

- **Small Size**
- **Steep Rejection**
- **Low Loss**


SPECIFICATIONS

Center Frequency, [GHz]	9.2
Insertion Loss@Center Freq. [dB]	1.2
1dB Bandwidth, [MHz] min.	250
20dB Bandwidth, [MHz] max.	380
Reject Bands, [GHz]	DC to 8.85 and 9.55 to 20
Reject Attenuation, [dB] min.	60
VSWR	1.5 : 1
Average Power, [Watts]	10
Operating Characteristics	
Operating Temperature	-40°C to +85°C
Impedance, [Ohm]	50

Ordering Information





Model No.	Connectors
FID7-9200-250	SMA

Outline drawing

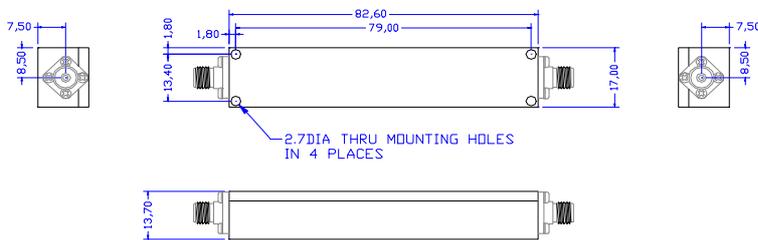

Dimensions in mm

Typical Performance

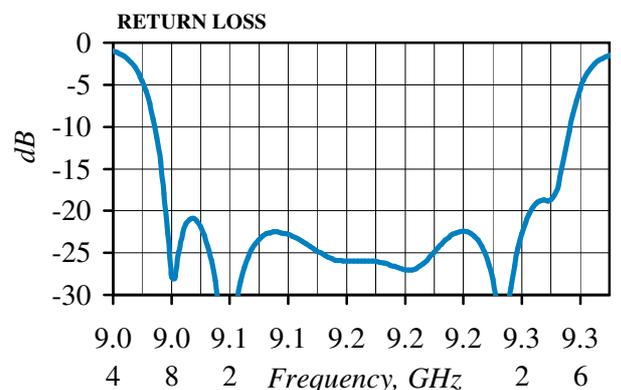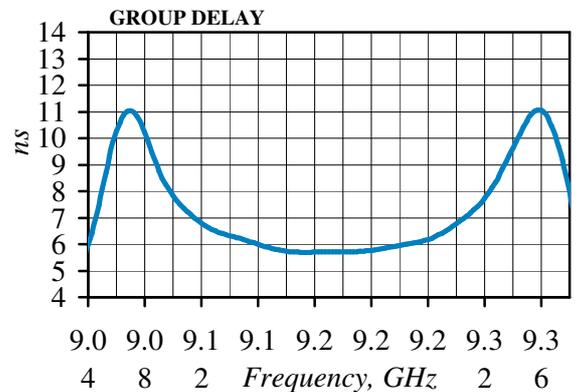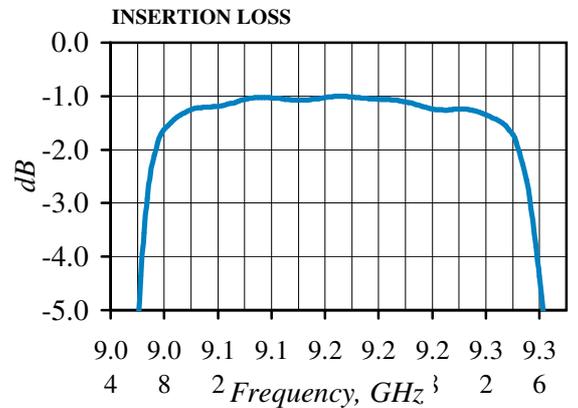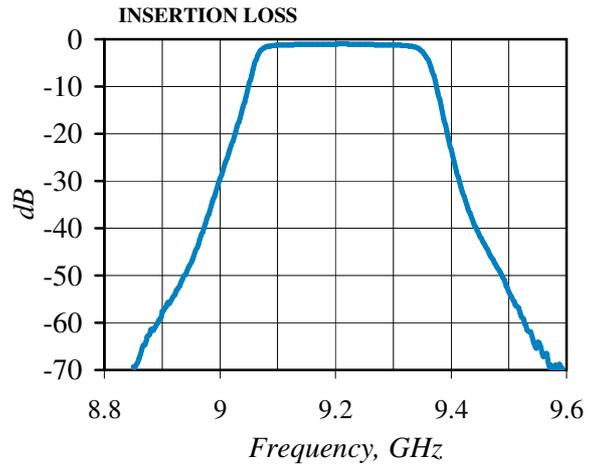

Specifications Subject To Change Without Notice