

**FEATURES :**

- *Low Loss*
- *Wide Stopband*
- *Small Size*

**SPECIFICATIONS**

3dB Corner Frequency, [MHz] min.	0.3
Passband Loss DC to 0.1MHz, [dB] max.	0.5
Rejection 10MHz to 3500MHz, [dB] min.	80
VSWR	1.2 : 1



**Operating Characteristics**

Input Power, [W] max.	0.1
Impedance, [Ohm]	50
Connectors	SMA female
Operating Temperature	-20°C to +70°C




**Ordering Information**

**Model No.**  
**FLL-100K**

**Outline drawing** dimensions in mm

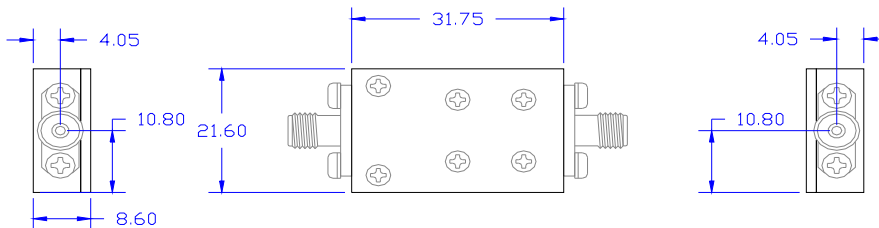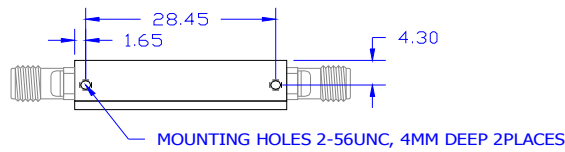

**Typical Performance**

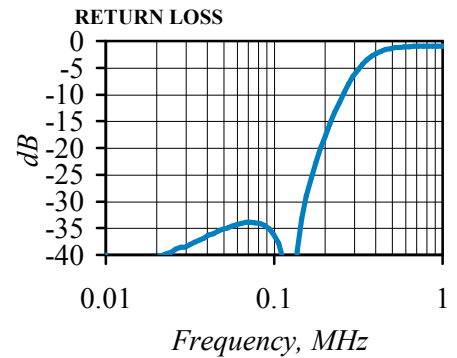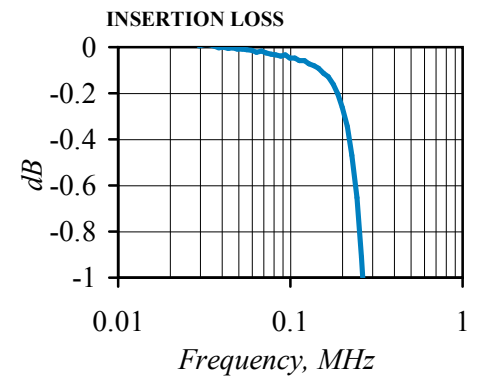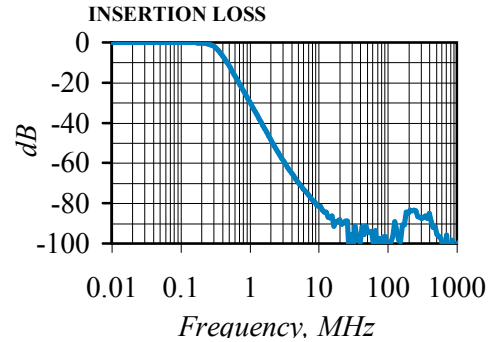

Specifications Subject To Change Without Notice