

**FEATURES :**

- *Low Loss*
- *High Power 150W CW*
- *Small Size*

**SPECIFICATIONS**

3dB Corner Frequency, [MHz] min.	25
Passband Loss DC to 20MHz, [dB] max.	0.8
Rejection 30MHz to 5000MHz, [dB] min.	40
VSWR	1.5 : 1


**Operating Characteristics**

Input Power, [W] with matched load	150
Impedance, [Ohm]	50
Connectors	N female
Operating Temperature	-20°C to +70°C

**Ordering Information**

**Model No.**  
**FLL-25-150W**

**Outline drawing** dimensions in mm

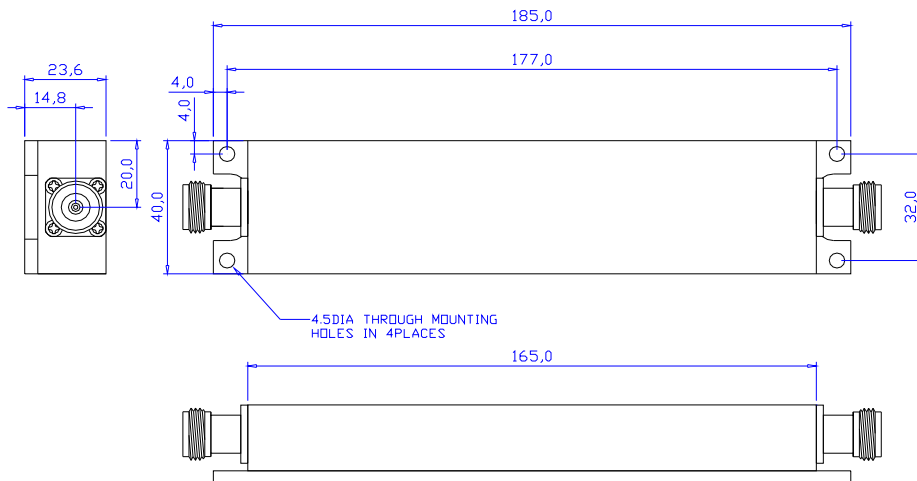

**Typical Performance**

