

FEATURES :

- *Elliptic Function*
- *Steep Cut-Off*
- *Small Size*
- *Wide Stopband*

SPECIFICATIONS

| | |
|---------------------------------------|---------|
| 3dB Corner Frequency, [MHz] typ. | 4.7 |
| Passband Loss DC to 4.5MHz, [dB] max. | 1.0 |
| Rejection 5.6MHz to 500MHz, [dB] min. | 60 |
| VSWR | 1.2 : 1 |


Operating Characteristics

| | |
|---|----------------|
| Max. Input Power, [W] with matched load | 10 |
| Impedance, [Ohm] | 50 |
| Connectors | SMA female |
| Operating Temperature | -20°C to +70°C |




Ordering Information

Model No.
FLLE9-4.5

Outline drawing dimensions in mm

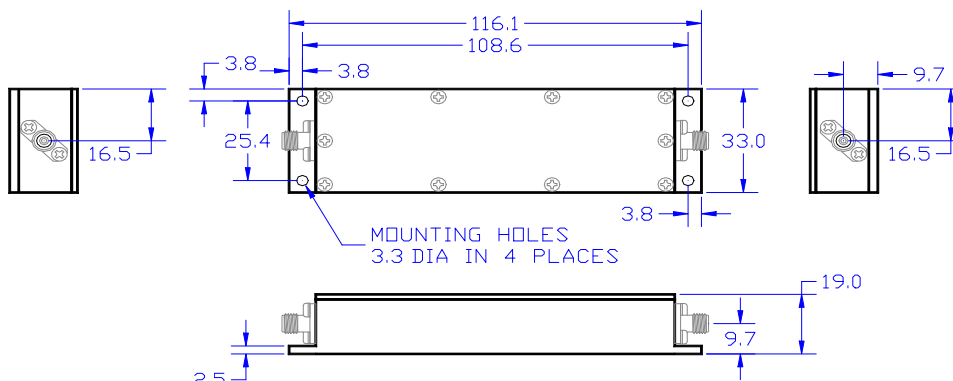

Typical Performance

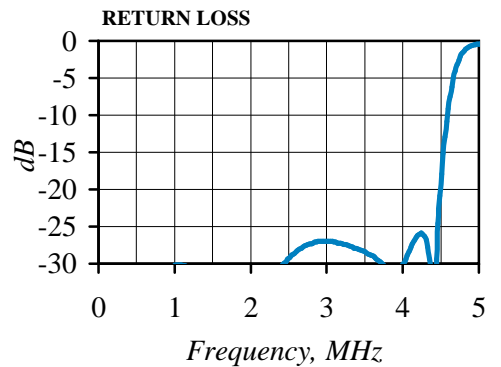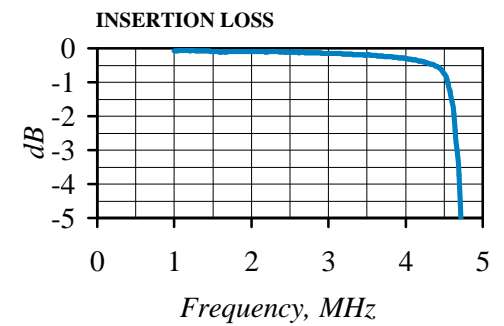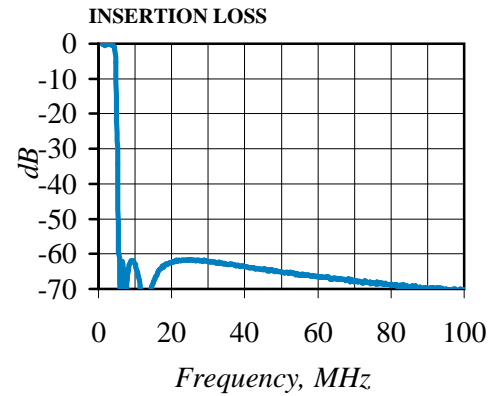

Specifications Subject To Change Without Notice