

FEATURES :

- Ultra low group delay variation
- Flat amplitude in passband
- Customized frequency and bandwidth options available

SPECIFICATIONS

Center Frequency, [MHz]	140
2.5dB Bandwidth, min [MHz]	18
7.5dB Bandwidth, max [MHz]	20.5
35dB Bandwidth, max [MHz]	29
Insertion Loss @ CF [dB]	10 ±1
Group Delay @ CF ±7.2 MHz [ns]	4
VSWR	1.3 : 1

Operating Characteristics


Operating Temperature	0°C to +70°C
Impedance, [Ohm]	75

Ordering Information





Model No.	Connectors
FLT/EQ-140-20-SMA	SMA
FLT/EQ-140-20-BNC	BNC

Outline drawing

Dimensions in inches

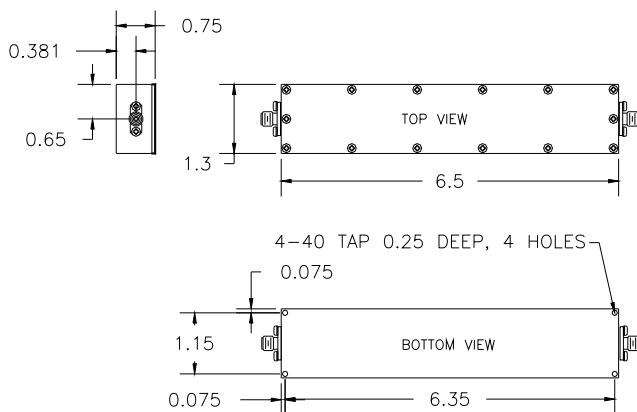

Typical Performance

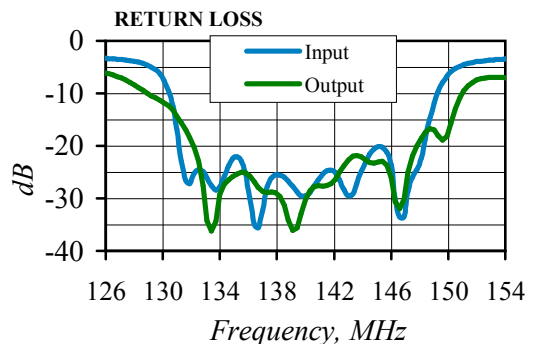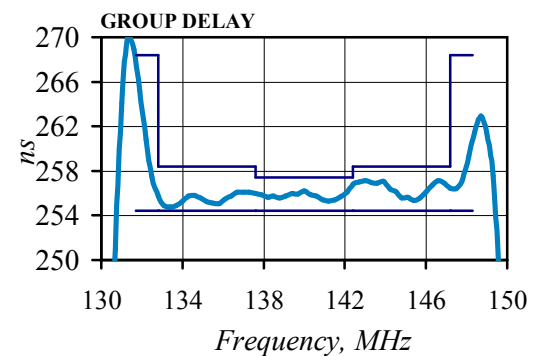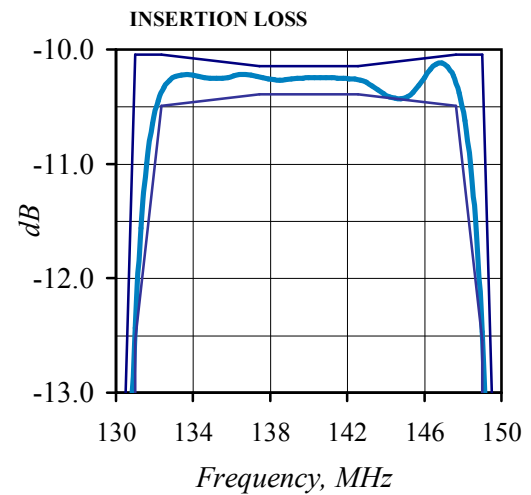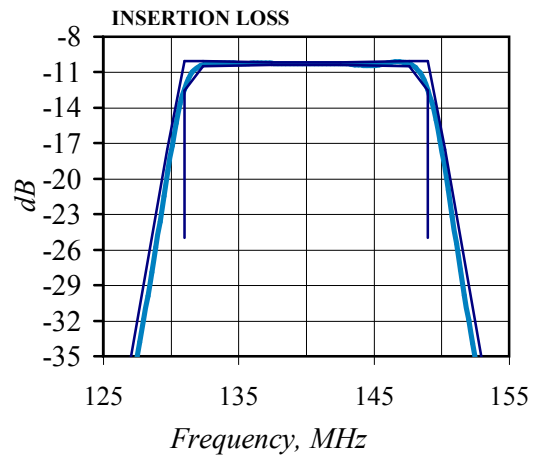

Specifications Subject To Change Without Notice