

FEATURES :

- Ultra low group delay variation
- Flat amplitude in passband
- Customized frequency and bandwidth options available

SPECIFICATIONS

Center Frequency, [MHz]	140
2.5dB Bandwidth, min [MHz]	30
10dB Bandwidth, max [MHz]	37.7
35dB Bandwidth, max [MHz]	57.1
Insertion Loss @ CF [dB]	10 ± 1
Group Delay @ CF ±12 MHz [ns]	4
VSWR	1.2 : 1


Operating Characteristics

Operating Temperature	0°C to +70°C
Impedance, [Ohm]	75





Ordering Information

Model No.	Connectors
FLT/EQ-140-30-SMA	SMA
FLT/EQ-140-30-BNC	BNC

Outline drawing Dimensions in inches

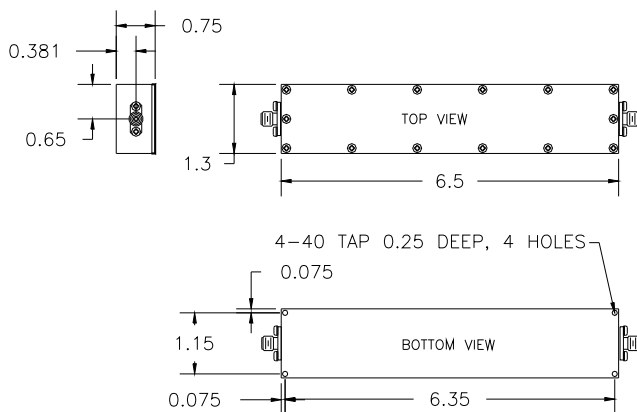

Typical Performance

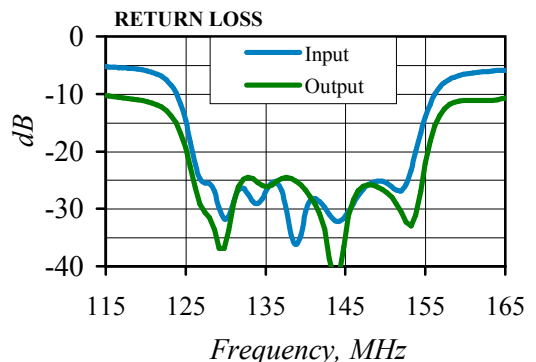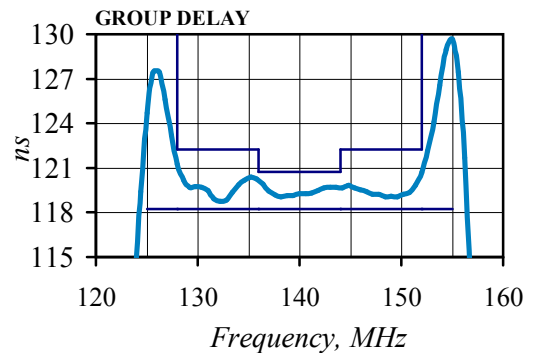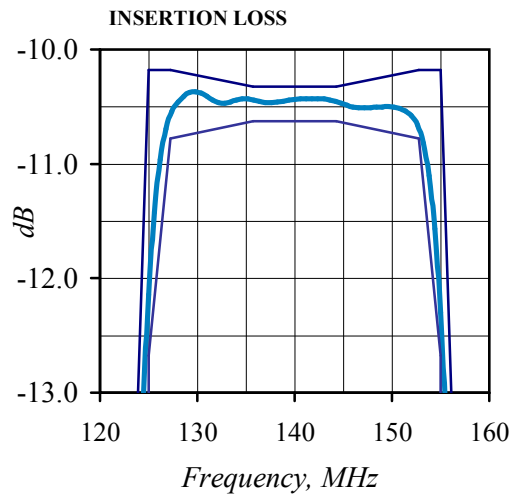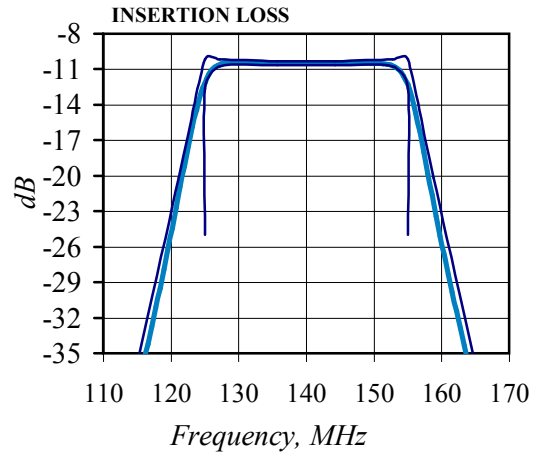

Specifications Subject To Change Without Notice