

FEATURES :

- Ultra low group delay variation
- Flat amplitude in passband
- Customized frequency and bandwidth options available

SPECIFICATIONS

| | |
|-------------------------------|---------|
| Center Frequency, [MHz] | 70 |
| 2.2dB Bandwidth, min [MHz] | 25.2 |
| 8.3dB Bandwidth, max [MHz] | 28.9 |
| 25dB Bandwidth, max [MHz] | 40 |
| Insertion Loss @ CF [dB] | 10 ±1 |
| Group Delay @ CF±10.1MHz [ns] | 3 |
| VSWR | 1,2 : 1 |

Operating Characteristics


| | |
|-----------------------|--------------|
| Operating Temperature | 0°C to +70°C |
| Impedance, [Ohm] | 75 |

Ordering Information





| Model No. | Connectors |
|------------------|------------|
| FLT/EQ-70-26-SMA | SMA |
| FLT/EQ-70-26-BNC | BNC |

Outline drawing

Dimensions in inches

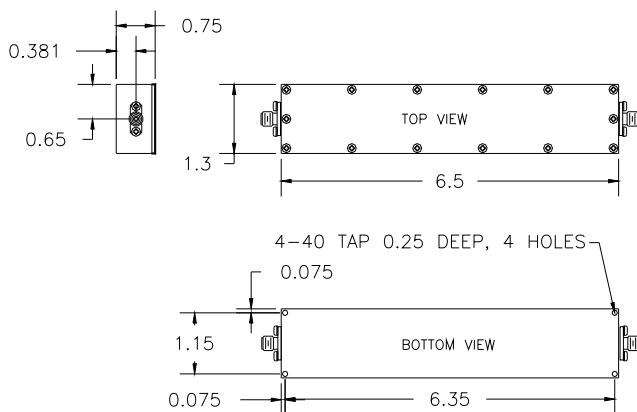

Typical Performance

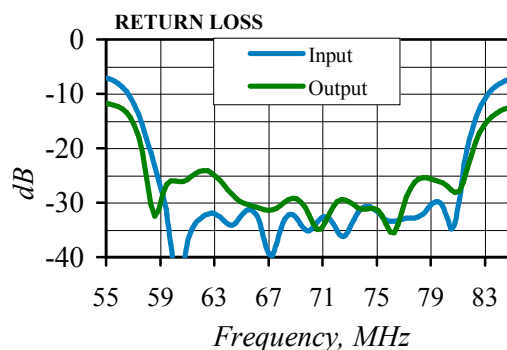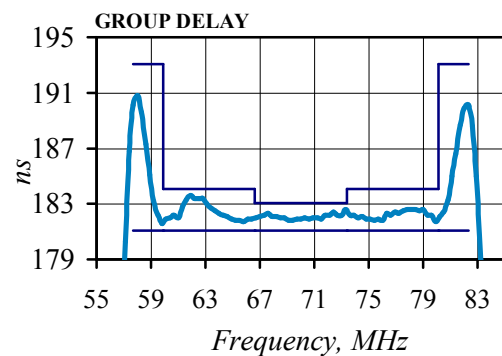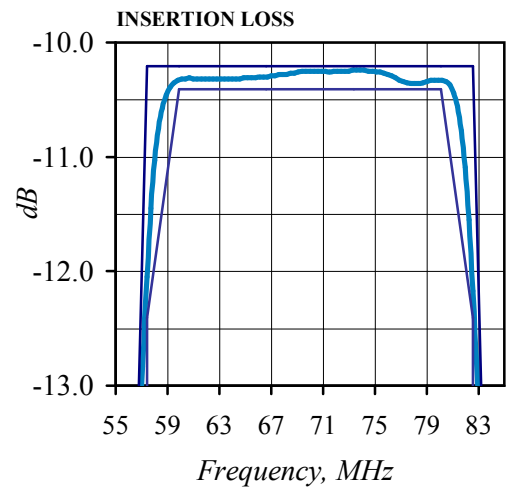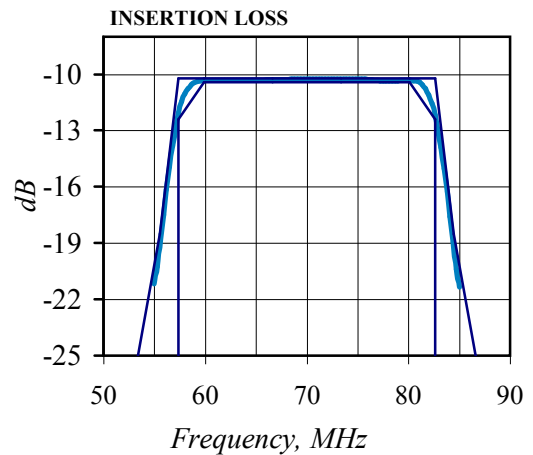

Specifications Subject To Change Without Notice